

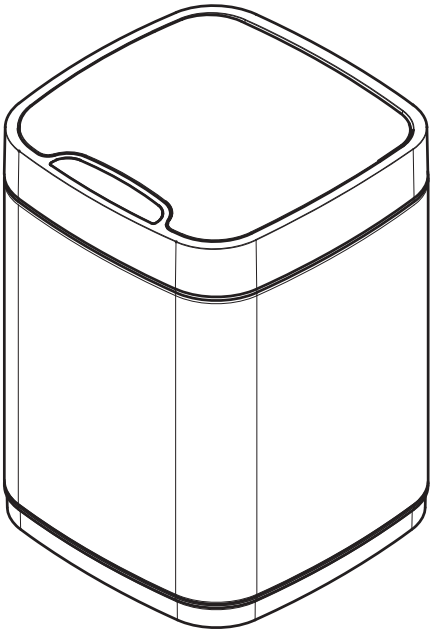


INSTALLATION INSTRUCTIONS




List of Accessories




- 1: Lid
- 2: Barrel head
- 3: Control panel
- 4: Barrel body
- 5: Inner barrel
- 6: A hook
- 7: Power switch
- 8: Battery box cover

Battery Installation


1) Open the battery box cover.




2) Put 4 AA size battery into the battery box according to the requirements of polarity(High-energy alkaline batteries are recommended for prolonging the evicse life of products).



3) Close the battery box cover after loading the battery (Please pay attention to the polarity).




4) Put the power to the "I" position and start using it.



The Use Method of liner and Recieve Ring in Inner Bin

- 1) Set the liner into the inner bin, turn the liner mouth inside out.
- 2) Tighten the excess liner mouth into the receive ring, then put the inner bin into the dustbin.



Function Introduction


Induction range:

- 1) This product uses infrared sensor to control the switch of lid.
- 2) The induction area is 20 cm (± 5 cm) above the control panel. When your hands are placed in the induction area, the lid will open automatically.




Operator schema:


- 1) Standby mode - After opening the switch, the lid will close and the red indicator light on the display screen will flash in about every 6 seconds.



- 2) Induction mode - The lid will open and all the indicator lights on the display screen will turn on automatically when the hands or objects are placed in the induction area; The lid will keep opening when the hands or objects keep in the induction area; The lid will close and the indicator lights will turn off in turn within 5 seconds automatically when the hands or objects leave from induction area.



- 3) Manual mode - The lid will open or close when touching/pressing the "OPEN" or "CLOSE" button. (Attention: The lid will keep opening after pressing the "OPEN" button, and the sensor will not work until the "CLOSE" button are pressed or the lid is closed manually.)



Product Maintenance and Notice

- The stainless steel barrel body of this product adopts anti-fingerprint technology and it is easy to be cleaned by half dry wet cloth.
- Keep the operating environment as dry as possible since it contains electronic accessories, which should avoid the water or rain. If they get wet, remove the battery and put the lid in a ventilated place or in the sun to dry before use it again.
- Turn off the power supply before cleaning the dustbin or removing the barrel head, to prevent the lid from opening automatically.
- Incorrect installation of polarity of batteries would cause the product to fail to work. It can keep operating for 3-6 months (on/off 20 times a day) when using high performance alkaline batteries. The reaction would become slow when it is in low power, and the lid would not be fully opened or cannot be opened if the battery is nearly exhausted. Replace new batteries when the lid does not open smoothly.
- Choose batteries with better performance to keep long operation cycles of products. Replace or remove the batteries in time if they are exhausted or not used for a long time, to prevent leakage of batteries from damaging the accessories of products.
- Waste battery should be settled according to local rule. Avoid the barrel head approaching the heat source to prevent the battery from exploding in abnormal environment.
- Don not scour the barrel head directly with water.

Common troubleshooting

Malfunction	Eliminating methods
If the lid cannot be opened properly	Please check whether the battery is installed accurately according to the polarity and if the spring contact well or not.
	Ensure the power is turning or not.
	Try again after 10 seconds.
If the lid cannot be closed properly.	Please check if there are any barriers in the induction area.
	If the circuit is damp, please do not power on, put it in ventilated place out to dry and try again.
If the lid opens slowly	Please check if the power is too low and then replace a new battery.
Attention: If all the methods above are not effective, please call the customer service hotline in time.	