

SPECIFICATIONS

Features

- Turn middle handle to control temperature.
- Turn top handle to divert water flow between two top outlets.
- Turn bottom handle to control water flow of bottom outlet.
- Combined box for easy installation.
- 100% Solid brass construction, extended durability for years of worry free service.
- 3/4" Water inlet and outlet size to ensure big volume.
- Integral stops: Shut off water supply at the valve for quick and easy repairs temperature to prevent scalding.
- Adjustable temperature limit stop: Allow user to control the maximum hot water.
- Vernet thermostatic cartridge: Precise ceramic control, maintaining select temperature to within $\pm 1.5^{\circ}\text{C}$.
- Ceramic diverter cartridge for smooth action and no drips.
- Optional for vertical and horizontal installations.
- With two spirit lever for easier installation.
- Fully serviceable from the front.


Codes and standards

- cUPC(ASME A112.18.1/CSA B125.1)


Warranty

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial and business applications.


3/4" Thermostatic Valve With 5 Way output Model: TSV53501

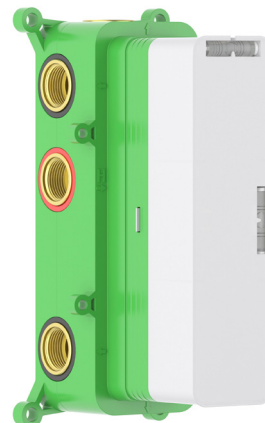


TECHNICAL DIAGRAM:

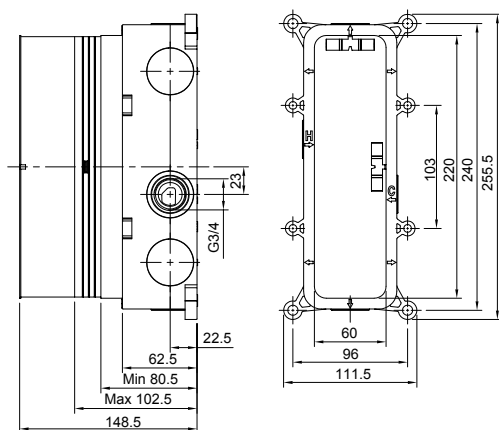

FLOW RATE:

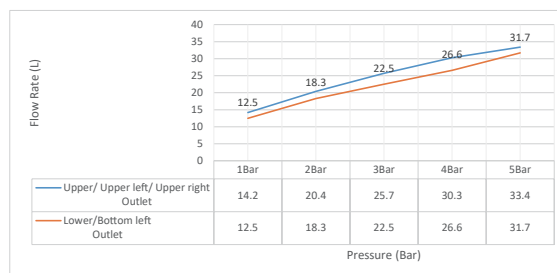

WATER DIVERSION DIAGRAM:

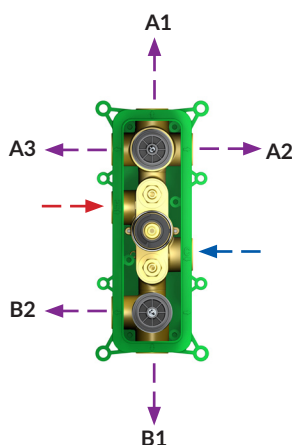

- Separate water output : A1 or A2 or A3 or B1 or B2
- Simultaneous water output:
(A1/A2/A3) & (B1/B2) on at same time