


# INSTALLATION INSTRUCTIONS

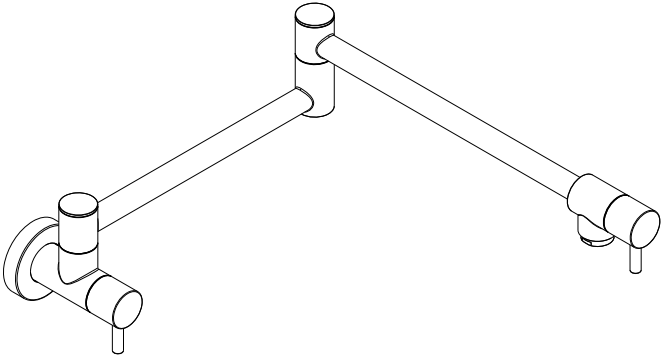


# FAUCET INSTALLATION

1

**CAUTION**

The **Pot Filler** must be installed on **Wall Studs** or **Wood Blocking** between Wall Studs and secured with screws.

This faucet is for use with **cold water only**. Do not connect it to the hot water supply.

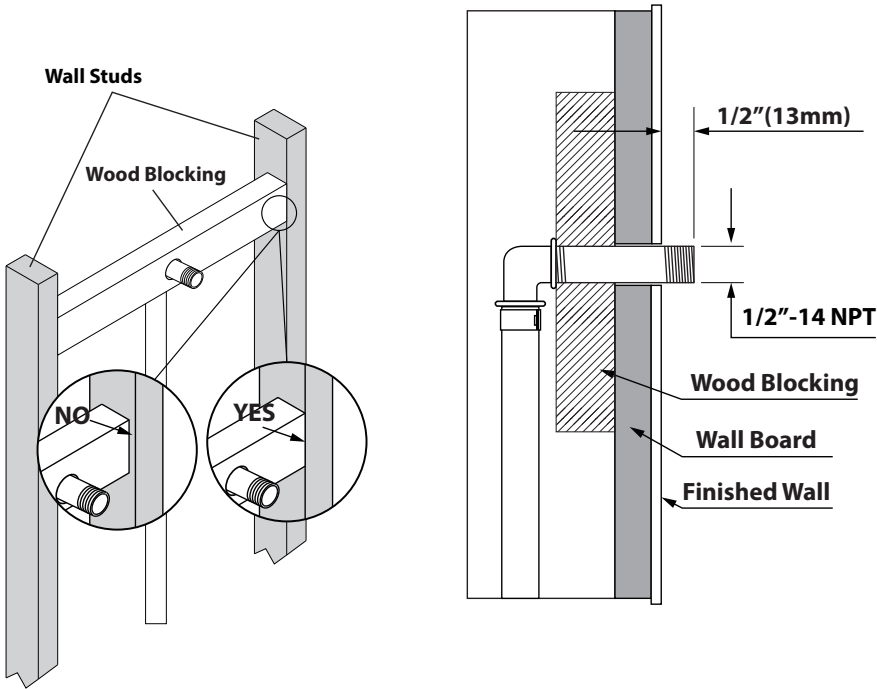


- Install a 2x6 Cross Brace within the wall between the Wall Studs.

Shut off water suppliers. Remove the old faucet, clean the mounting surface.  
Finish installing the wall board and the finished wall.

**Note:** For first time install, flush the pipes first by open the angel valve to run 60s.

# FAUCET INSTALLATION

2

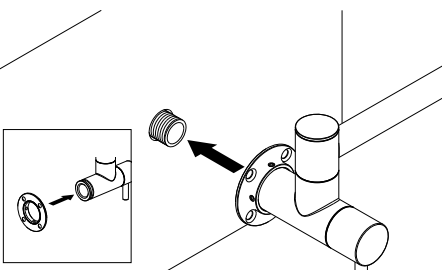


After attaching the flange to the faucet, install the faucet onto the 1/2 NPT nipple protruding from the wall. Do not over-tighten.

3


CAUTION

Do not drill into hidden electrical or plumbing lines.




Rotate the flange to avoid pipes behind the wall, then mark the positions for the installation holes accordingly. Remove the faucet and flange from the wall, then drill holes at the marked positions. (Be careful of the pipes behind the wall.)

4

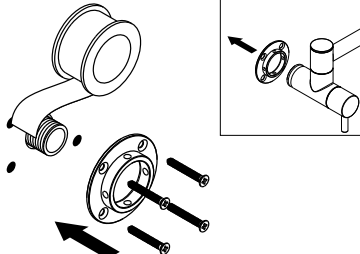


Wrap PTFE tape around the nipple, then secure the flange to the wall using screws.

5

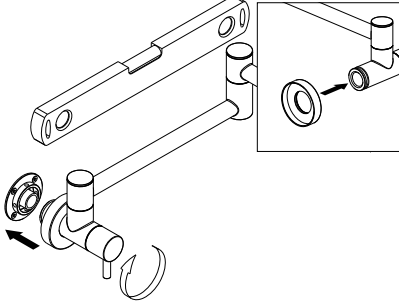


Install the faucet onto the nipple and use a small level to ensure it is straight.

6

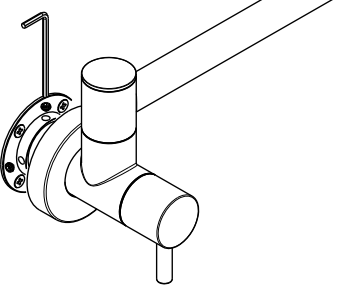


Once the faucet is level, use the provided Allen key to secure the flange and faucet in place.

7

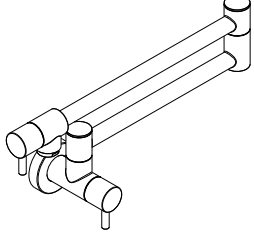

Remove aerator and turn faucet handles to the full on position. Turn on cold water supplies and flush water lines for one minute, check for leaks and proper operation.  
**Important: This flushes away any debris that could cause damage to internal parts.**  
Check all connections at arrow for leaks. Re-tighten if necessary, but do not overtighten. Reinstall the aerator.

# DIMENSIONS

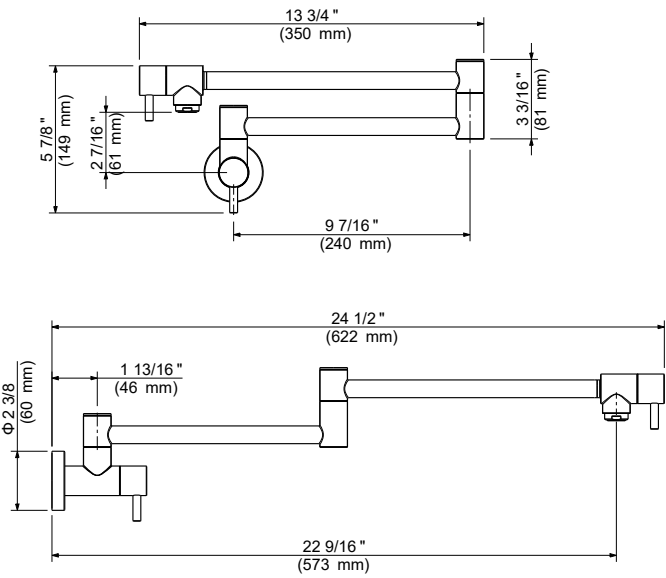

# CLEANING AND CARE

Clean the faucet often with a soft cloth to keep it looking like new. For heavy cleaning you can use mild liquid detergents or non-abrasive liquid polisher. Rinse with water and dry with a soft cloth. Avoid abrasive cleaners, steel wool and harsh chemicals as these will dull the finish and void your warranty.